



AQUA XL

FLOAT SWITCH WITH INTERNAL BALLAST

For level control of multiple pumps




USE

VR – Emptying / Filling


SIZE

Height: 165 mm – Diameter: 100 mm

DIFFERENTIAL ANGLE

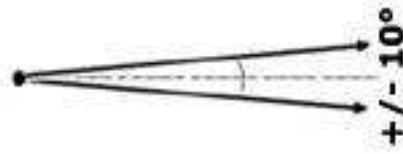

WIRING

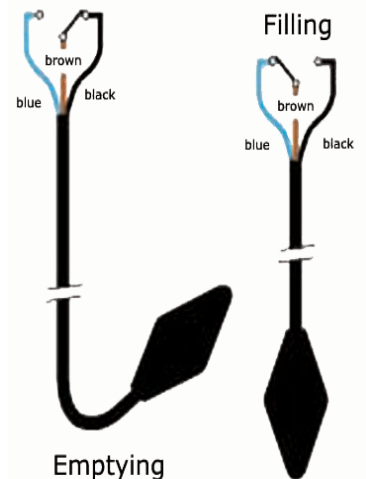

Please, refer to the connection diagram enclosed to each float delivered.

APPLICATIONS

For use in various liquids. Perfect for pumping stations, construction sites, waste water plants, and diverse industrial applications. Suitable as well for high/low level alarm.

The AQUA XL is recommended when dealing with thick grease layers on the liquid surface.

TECHNICAL CHARACTERISTICS

Operation mode	Omnidirectional
Maximum pressure	2 bars
Maximum temperature	70°C
Protection index	IP 68
Electric characteristics	250 VCA/VCC 50/60 Hz
Cut-out power	10(4) A (10 A resistive – 4 A inductive)
Microswitch	Silver / nickel reverser contacts
Housing material	Polypropylene
Cable material	PVC
Cable type	3X0.75 mm ² wire conductors
Float weight without cable	775 g
Cable weight	PVC 65 g/m
Ballast type	Internal
Standard cable length (series)	6, 10, 15, 20 and 30 m (other lengths on request)



ATMI – Z.A. de l'Observatoire – 2 avenue des Bosquets – 78180 Montigny le Bretonneux – France

Tél: +33 (0)1 61 37 35 60

Fax: +33 (0)1 61 37 35 69

Site Internet: www.atmi.fr

E-Mail: sales@atmi.fr

N° 200406986