


TYPE FL52

Type FL52 is a standard float switch designed for monitoring liquid levels.

The float switch can be equipped with one or more points switches (floats) and a variety of process connections are available. The standard case material for immersed parts is ST.ST.316.

Type FL52 is available in a variety of features and options to meet users' specific requirements, including:

- Number of Floats
- Number of Contacts
- Process Connection
- Material
- Dimensions

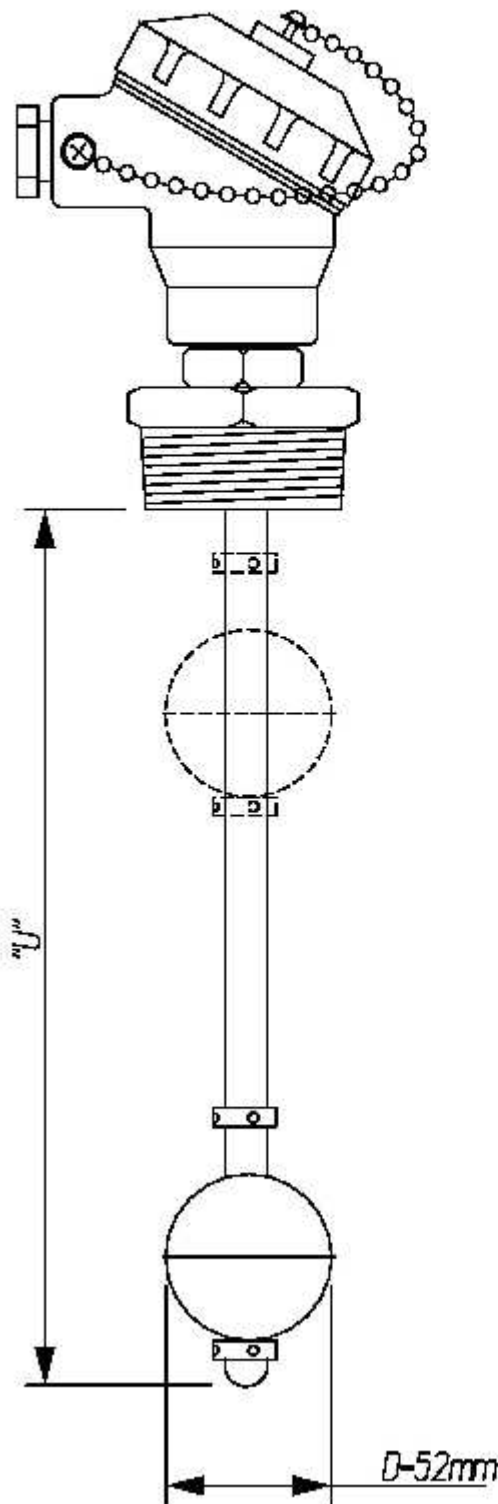

TF52

Michshur S.Z. (1984) Ltd.
 8 Hagavish St.
 P.O.B. 1951 Holon 5881614
 ISRAEL
 Phone: 972-3-6508585 Fax: 972-3-6508586

HOW TO ORDER

TABLE NO

1

2

3

4

5

6

EXAMPLE
ORDER NO
FL52

2

3

M

8

250

15A

Example Order No. = Type FL52; two floats; three contacts; 2" B.S.P process connection ; ST.ST.316 material ; 250mm long ; aluminium connection head.

Table 1. Floats

Insert number of floats

Table 3. Process
Connection

Order

Diameter

M

2" BSP

O

Other

Table 4. Material

Order

Description

8

316 ST.ST.

O

Other

Table 2. Contacts

Insert number of contacts

Table 5. Dimension "U"

Insert "U" in mm
(3 digit)

Table 6. Connection Head

Order

Description

15A

Cast aluminum epoxy coated screwed cover

16B

Aluminum type "B"

18P

Reinforced Polypropilene

19E

EX-proof Cast aluminum epoxy coated

20I

Cast iron epoxy coated screwed cover

21GN

Nylon + Glass Fiber

22GP

Glass Reinforced Polyamid

23PH

Phenil Polyoxide

XC

X meters PVC Cable connection