



V-Form Glass Thermometers for Machines

according to DIN 16181 - 16195

TGL/TGK

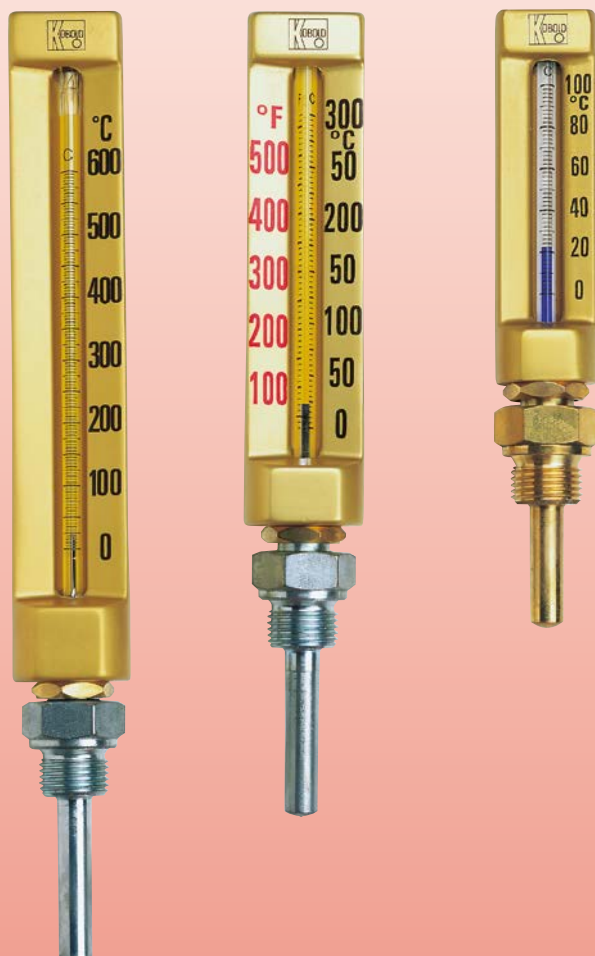

- Measuring ranges:
-60 ... +40 °C to 0 ... 200 °C
- Max. pressure: 15 bar
- Accuracy class: 1.0
- Connection: G 1/2 M, 1/2" NPT
- Bulb: Brass
- Fill: Blue thermometer fluid
- Option: With plastic casing
light weight and economically
priced
- Anodized numbers
- Engraved glass scale



T2

KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, DOMINICAN REPUBLIC, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, ROMANIA, SINGAPORE, SOUTH KOREA, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com



Description

Liquid-in-glass thermometers for machines are economical and rugged. The use of high-quality glass enables the thermometer to maintain a steady measuring accuracy and repeatability.

The liquid-in-glass thermometers for machines comprise a rugged protective casing, an indicating capillary and the mounting fitting with rigid connection.

The protective casing is made of brass-coloured anodized aluminium or of reasonably-priced gold-coloured plastic for 150 mm lengths.

Scale numbering is black. The indicating capillary is backed in white with a wide easy-to-read indicating column filled with blue indicator fluid. The graduation is diffused into the glass and is thus resistant to aggressive service environments.


The indicating accuracy is 1% of full scale value. The capillary is manufactured from PTB approved thermometer glass, N16B or 8409 Supremaxglas.

The mounting fittings are delivered according to DIN form B with G ½ or ½" NPT external thread. The bulbs are made of solid brass up to a maximum immersion length of 63 mm.

The bulbs are hard soldered for longer immersion lengths. Max. operating pressure is 15 bar.

The standard liquid-in-glass thermometers for machines are available in instrument lengths 200, 150 and 110 mm in straight and in 90° angular form. Other models upon request.

Design

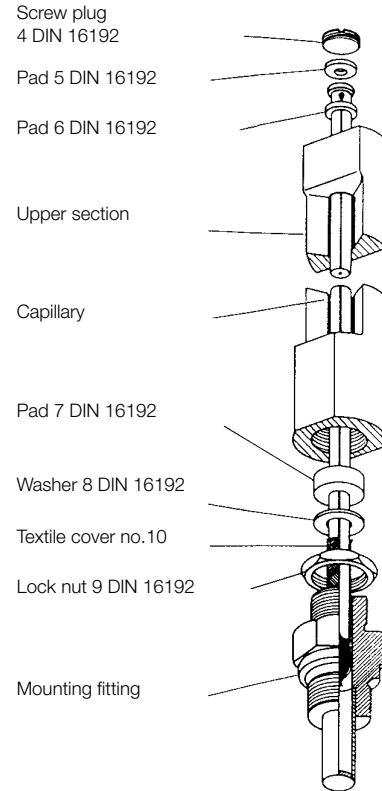

Applications

V-form thermometers for machines are suited to direct temperature measurement on site of liquid media.

Areas of application include:

- Air conditioning and refrigeration
- Heating systems and kilns
- Equipment and plant engineering
- Engine manufacturing
- District heating power stations

Aluminium casing 110 x 36 mm, form B acc. to DIN 16181 connection G ½ A or ½" NPT, straight version

	Model	Measuring range/ scaling	Dial	Immersion length L1	Connection
	TGL-1164...	-60...+ 40/2 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm	...G = G ½ male ...N = ½" NPT
	TGL-1135...	-30...+ 50/2 °C		...050... = 50 mm	
	TGL-1106...	0...+ 60/1 °C		...063... = 63 mm	
	TGL-1110...	0...+ 100/2 °C		...100... = 100 mm	
	TGL-1112...	0...+ 120/2 °C		...160... = 160 mm	
	TGL-1116...	0...+ 160/5 °C			

Important! Minimum order quantity for each item: 5 pieces

Aluminium casing 150 x 36 mm, form B according to DIN 16185 connection G $\frac{1}{2}$ " A or $\frac{1}{2}$ " NPT, straight version

	Model	Measuring range/ scaling	Dial	Immersion length L1	Connection
	TGL-5164...	-60... + 40/2 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGL-5135...	-30... + 50/1 °C			
	TGL-5106...	0... + 60/1 °C			
	TGL-5110...	0... + 100/2 °C			
	TGL-5112...	0... + 120/2 °C			
	TGL-5116...	0... + 160/2 °C			
	TGL-5120...	0... + 200/2 °C			

Plastic casing 150 x 36 mm, form B according to DIN 16185 connection G $\frac{1}{2}$ " A or $\frac{1}{2}$ " NPT, straight version

	Model	Measuring range/ scaling	Dial	Immersion length L1	Connection
	TGK-5164...	-60... + 40/2 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGK-5135...	-30... + 50/1 °C			
	TGK-5106...	0... + 60/1 °C			
	TGK-5110...	0... + 100/2 °C			
	TGK-5112...	0... + 120/2 °C			
	TGK-5116...	0... + 160/2 °C			
	TGK-5120...	0... + 200/2 °C			

Aluminium casing 150 x 36 mm, form B according to DIN 16186 connection G $\frac{1}{2}$ " A or $\frac{1}{2}$ " NPT, angular version

	Model	Measuring range/ scaling	Dial	Immersion length L1	Connection
	TGL-5264...	-60... + 40/2 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGL-5235...	-30... + 50/1 °C			
	TGL-5206...	0... + 60/1 °C			
	TGL-5210...	0... + 100/2 °C			
	TGL-5212...	0... + 120/2 °C			
	TGL-5216...	0... + 160/2 °C			
	TGL-5220...	0... + 200/2 °C			

Plastic casing 150 x 36 mm, form B according to DIN 16186 connection G $\frac{1}{2}$ " A or $\frac{1}{2}$ " NPT, angular version

	Model	Measuring range/ scaling	Dial	Immersion length L1	Connection
	TGK-5264...	-60... + 40/2 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGK-5235...	-30... + 50/1 °C			
	TGK-5206...	0... + 60/1 °C			
	TGK-5210...	0... + 100/2 °C			
	TGK-5212...	0... + 120/2 °C			
	TGK-5216...	0... + 160/2 °C			
	TGK-5220...	0... + 200/2 °C			



V-Form Glass Thermometers for Machines according to DIN 16181-16195 Model TGL, TGK

Aluminium casing 200 x 36 mm, form B according to DIN 16189 connection G $\frac{1}{2}$ A or $\frac{1}{2}$ " NPT, straight version


	Model	Measuring range/ scaling	Dial	Immersion length L ₁	Connection
	TGL-2164...	-60... + 40/1 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGL-2135...	-30... + 50/1 °C			
	TGL-2106...	0... + 60/1 °C			
	TGL-2110...	0... + 100/1 °C			
	TGL-2112...	0... + 120/1 °C			
	TGL-2116...	0... + 160/2 °C			
	TGL-2120...	0... + 200/2 °C			

Aluminium casing 200 x 36 mm, form B according to DIN 16190 connection G $\frac{1}{2}$ A, angular version


	Model	Measuring range/ scaling	Dial	Immersion length L ₁	Connection
	TGL-2264...	-60... + 40/1 °C	...C... = °C ...F... = dual scale °C/°F	...040... = 40 mm ...050... = 50 mm ...063... = 63 mm ...100... = 100 mm ...160... = 160 mm	...G = G $\frac{1}{2}$ male ...N = $\frac{1}{2}$ " NPT
	TGL-2235...	-30... + 50/1 °C			
	TGL-2206...	0... + 60/1 °C			
	TGL-2210...	0... + 100/1 °C			
	TGL-2212...	0... + 120/1 °C			
	TGL-2216...	0... + 160/2 °C			
	TGL-2220...	0... + 200/2 °C			

Dimensions [mm]

Straight version

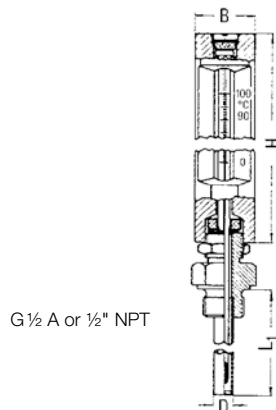

Angular version

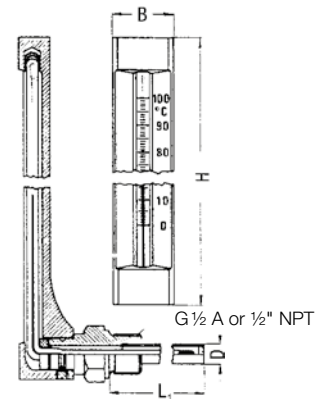

Model	H [mm]	B [mm]	L ₁ [mm]	D [mm]
TGL-11...	110	30	40, 50, 63, 100, 160	10
TGK-51/TGL-51...	150	36	40, 50, 63, 100, 160	10
TGL-21...	200	36	40, 50, 63, 100, 160	10

Model	H [mm]	B [mm]	L ₁ [mm]	D [mm]
TGK-52/TGL-52...	150	36	40, 50, 63, 100, 160	10
TGL-22...	200	36	40, 50, 63, 100, 160	10